



## SJ9241 RT | SJ9250 RT ROUGH TERRAIN SCISSOR LIFTS

Skyjack's Full-Size Series Rough Terrain Scissor Lifts deliver huge platforms, soaring work heights and heavy duty capacities — all in one package! Both the SJ9241 RT and SJ9250 RT feature an expansive platform, up to 7.21 m in length, when both 1.53 m powered extension decks are extended. With working heights up to 17.24 m and standard independent/auto levelling outriggers, these units can meet the needs of even the most challenging job sites.

An easily accessible Kubota diesel engine powers a robust axle based 4WD system with "no-spin" and limited slip differentials, delivering excellent job site terrainability.



**SKYJACK**

# ROUGH TERRAIN SCISSOR LIFTS

## SPECIFICATIONS

SJ9241 RT

SJ9250 RT

2006/42/CE

<b>A Work Height</b>	14.50 m	17.24 m
<b>B Raised Platform Height</b>	12.50 m	15.24 m
<b>C Lowered Platform Height</b>	1.68 m	2.01 m
<b>D Overall Width</b>	2.34 m	2.34 m
<b>E Overall Length</b>	4.47 m	4.47 m
<b>F Stowed Height (Rails Up)</b>	2.84 m	3.16 m
<b>G Stowed Height (Rails Down)</b>	1.98 m	2.29 m
<b>H Platform Width (Inside Dimension)</b>	1.88 m	1.88 m
<b>Platform Length Stowed (Inside Dimension)</b>	4.27 m	4.27 m
<b>I Platform Length Extended (Inside Dimension)</b>	7.21 m	7.21 m
<b>Ground Clearance</b>	0.20 m	0.20 m
<b>Wheelbase</b>	3.02 m	3.02 m
<b>Weight</b>	6715 kg	7407 kg
<b>Gradeability</b>	30%	30%
<b>Turning Radius (Inside)</b>	5.33 m	5.33 m
<b>Turning Radius (Outside)</b>	7.65 m	7.65 m
<b>Lift Time (With Rated Load)</b>	62 sec	64 sec
<b>Drive Speed (Stowed)</b>	3.8 km/h	3.8 km/h
<b>Drive Speed (Raised)</b>	0.72 km/h	0.72 km/h
<b>Maximum Drive Height</b>	Full Height	7.9 m
<b>Capacity (Overall)</b>	681 kg	681 kg
<b>Maximum # of Persons</b>	5	5


## STANDARD FEATURES

- Axle based 4WD
- "No Spin" rear differential and limited slip front differential
- Disc brake system on rear axle
- 29hp Kubota diesel engine on roll out tray
- Self centering scissor design
- Dual powered extension decks (1.53 m front and rear)
- Large 7.21 m total working platform length
- Independent/auto levelling outriggers
- Analog control system
- Colour coded and numbered wiring system
- 30% gradeability
- Foam-filled tyres
- Wiring for AC outlet on platform
- Tilt alarm with drive & lift cut-out
- Overload sensing system
- Lowering warning system
- Flashing light
- Operator horn
- Fold down hinged railing system
- Half height spring hinged gates on both sides
- Scissor guards
- Lanyard attachment points
- Tie down/lift lugs

## OPTIONS‡

- Diesel engine with scrubber
- All motion audible alarm
- Airline to platform
- 3.5kW hydraulic generator
- Full height spring hinged gates
- Non-marking grip lug foam-filled tyres

‡ Capacities, and machine weights may differ when options are added

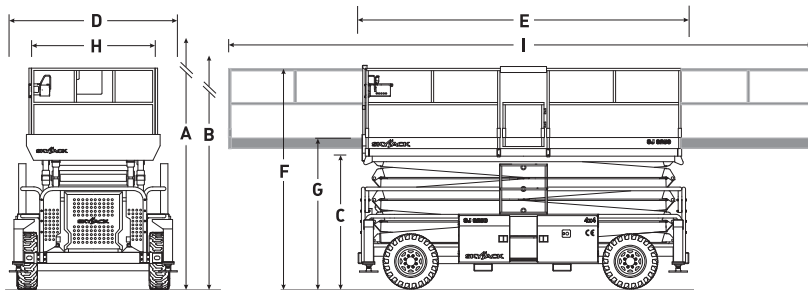

Model	Capacity With 2 Extension Decks		
	Main	Front Ext.	Rear Ext.
SJ 9241	227 kg	227 kg	227 kg
SJ 9250	227 kg	227 kg	227 kg

### Skyjack Head Office

55 Campbell Rd. Guelph, ON Canada  
N1H 1B9  
Sales Inquiries: 1-877-755-4387  
(1-877-SJLIFTS)  
Main Switchboard: 1-800-265-2738  
Phone: 1-519-837-0888  
Fax: 1-519-837-8104  
Email: skyjack@skyjack.com

www.skyjack.com

### Skyjack UK

Unit 1, Maes-y-Clawdd  
Maesbury Road Industrial Estate  
Oswestry, Shropshire, SY10 8NN  
Tel: +44 1691 676235  
Fax: +44 1691 676239  
Email: info@skyjackeurope.co.uk

### Skyjack France

ZI Le Clairin  
69700 Saint Romain en Gier  
France  
Tel: +33 (0) 4 78 73 53 32  
Fax: +33 (0) 4 78 56 52 42

### Skyjack Hebebühnen GmbH (Deutschland)

Därmanbusch 2a  
58456 Witten  
Tel: +49 (0)2302 20 26 909  
Fax: +49 (0)2302 20 25 671

### Skyjack AB (Sweden)

Marieholmsgatan 2  
415 02 Göteborg  
Sweden  
Tel: +46 31212245  
Fax: +46 31212066



# SKYJACK™

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. CE marked work platforms are in conformance to Machinery Directive 2006/42/EC.